




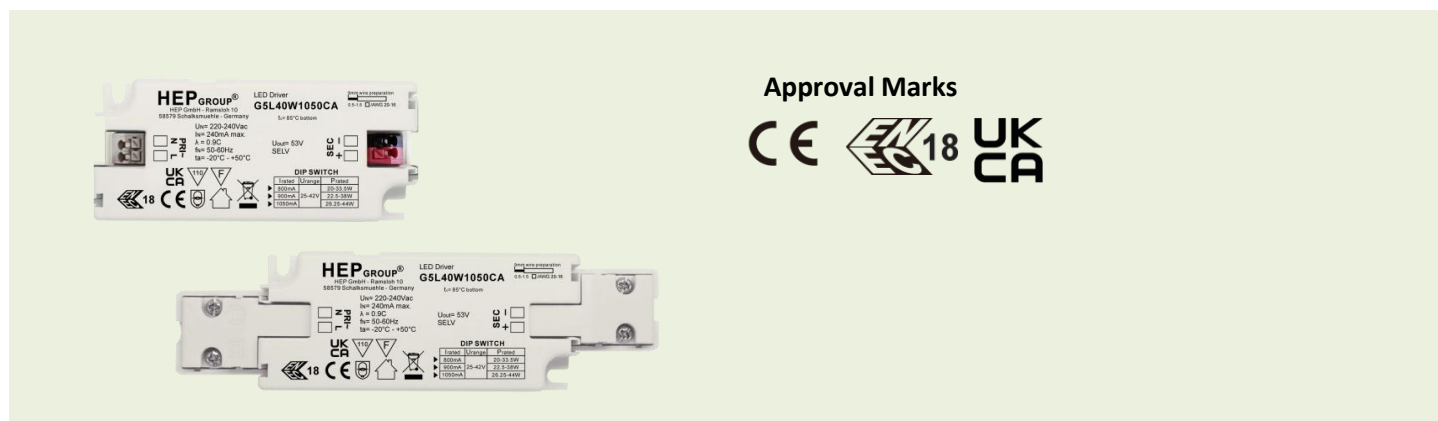


Item		Value	Remark
Input	Nominal voltage	220–240V	
	Nominal frequency	50–60Hz	
	AC voltage range	198–264V	
	DC voltage range (start)	NA	
	DC voltage range (operation)	NA	
	Nominal current	240mA	
	Total Harmonic Distortion (THD)	< 15%	Full load @230VAC
	Power factor	0.9C	Full load @230VAC
	Displacement factor	0.9C	Full load @230VAC
	Efficiency	89%(Typ.)	Full load @230VAC
	No-load power	NA	
	Stand-by power	NA	
Protection class		II	Suitable for class II luminaires
Inrush current		17A / 320us	
Max.units per circuit breaker		Type B , 10A MCB	15
		Type B , 16A MCB	24
		Type C , 10A MCB	21
		Type C , 16A MCB	33
Touch current		< 0.7mA peak	IEC/EN 61347-1
Output	Nominal voltage range	25-42Vdc	
	Maximum voltage	53Vdc	
	Nominal current range		
	I _{out} =800mA	800mA	
	I _{out} =900mA	900mA	
	I _{out} =1050mA	1050mA	
	Current accuracy	± 5%	
	Typical output LF current ripple	± 2.5%	Low Frequency<120Hz
	Starting time	< 0.2 S	Full load @230VAC
SVM		≤ 0.4	Full load @230VAC
P _{stLM}		≤ 1	Full load @230VAC

	Item	Value	Remark
Output	Nominal power range		
	I _{out} =800mA	20-33.5W	
	I _{out} =900mA	22.5-38W	
	I _{out} =1050mA	26.25-44W	
	Maximum power	44W	
Dimming	Dimming control	NA	
	Dimming technique	NA	
	PWM frequency	NA	
	Dimming range	NA	
	Lowest dimming current	NA	
	Galvanic isolation	NA	
Environment	Ambient temperature range t _a	-20°C - +50°C	
	Maximum case temperature t _c	85°C	bottom
	Max. case temp. in fault condition	110°C	When operating under fault conditions, the temperature of the enclosure at any location should not exceed 110 °C
	Storage temperature range	-30°C - +85°C	
	Relative humidity	10%-95%	
	Surge transient protection	1 kV , 2 kV	L-N , L/N-PE
	Environmental rating	Indoor	
	IP rating	IP20	
	Mains switching cycles	> 100,000	
	Expected lifetime	> 50,000 h, t _c 85 °C @ t _a 50 °C > 100,000 h, t _c 75 °C @ t _a 40 °C	0.2 % / 1,000 h failure rate 0.1 % / 1,000 h failure rate
Packing	Gross weight/box	4.3 kg / 9.7 kg	Built-in /Independent
	Net weight/box	3.6 kg / 9.1 kg	Built-in /Independent
	Pcs/box	40PCS / 100PCS	Built-in /Independent
	Dimension/box	240(L)*190(W)*185(H)mm	Built-in Type
		460(L)*220(W)*185(H)mm	Independent Type
Protections			
	Short-circuit Protection	Auto recovery	
	Open-circuit Protection	Auto recovery	
	Overload Protection	Auto recovery	
Conformity & Standards			
	Safety standard:	EN 61347-1, EN 61347-2-13, EN 62493	
	Performance:	EN 62384	
	EMC:	EN 55015, EN 61000-3-2, EN 61000-3-3, EN 61547	
Cable information			
PRI			
	Cable cross-section	0.5-1.5mm ² /AWG 20-16	
	Stripping	9mm	
	Pull test cable type	H03VV(H2)-F 2x0,75-1,0 mm ²	
SEC			
	Cable cross-section	0.5-1.5mm ² /AWG 20-16	
	Stripping	9mm	
Terminal information			
	PRI-Push button/Angled Entry		
	SEC-Push button/Angled Entry (Red/Black)		

Subject to change without notice, HEP guarantees all products perform functionally well

* If not mentioned, all the test conditions are based on full load at 230VAC input (for 220-240 VAC input).

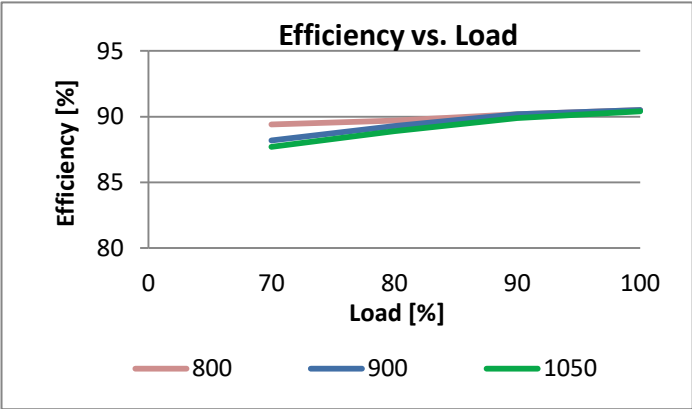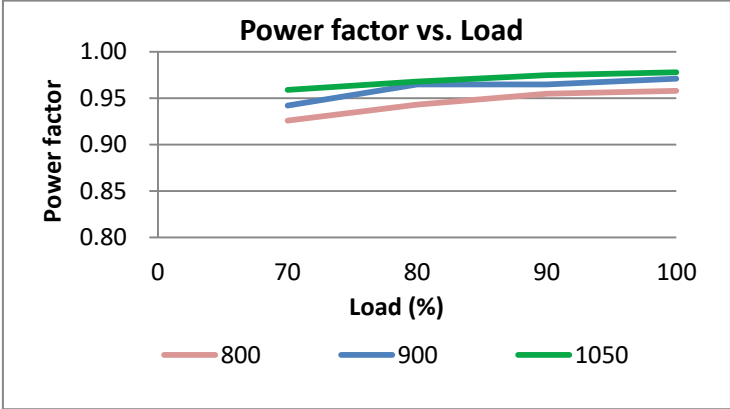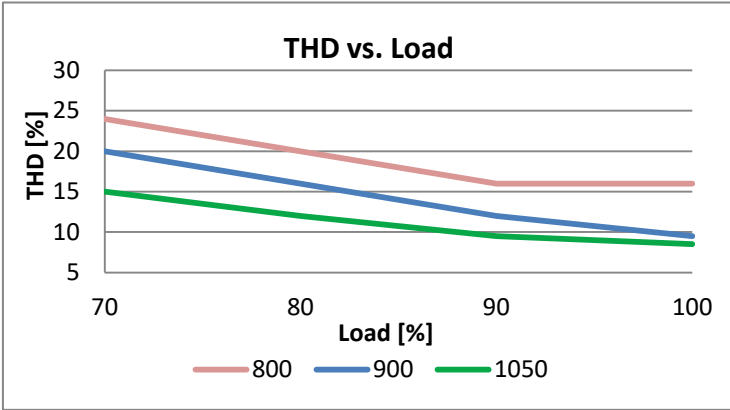


Physical

Parameter ▼ Application:In case a independent installation is required, the same driver can be used by adding the side cover


(1) (2) By adding side covers the built-in type simply easy as an independent unit.

(3) Regarding the independent type,DIP switch will be covered by white rubber.

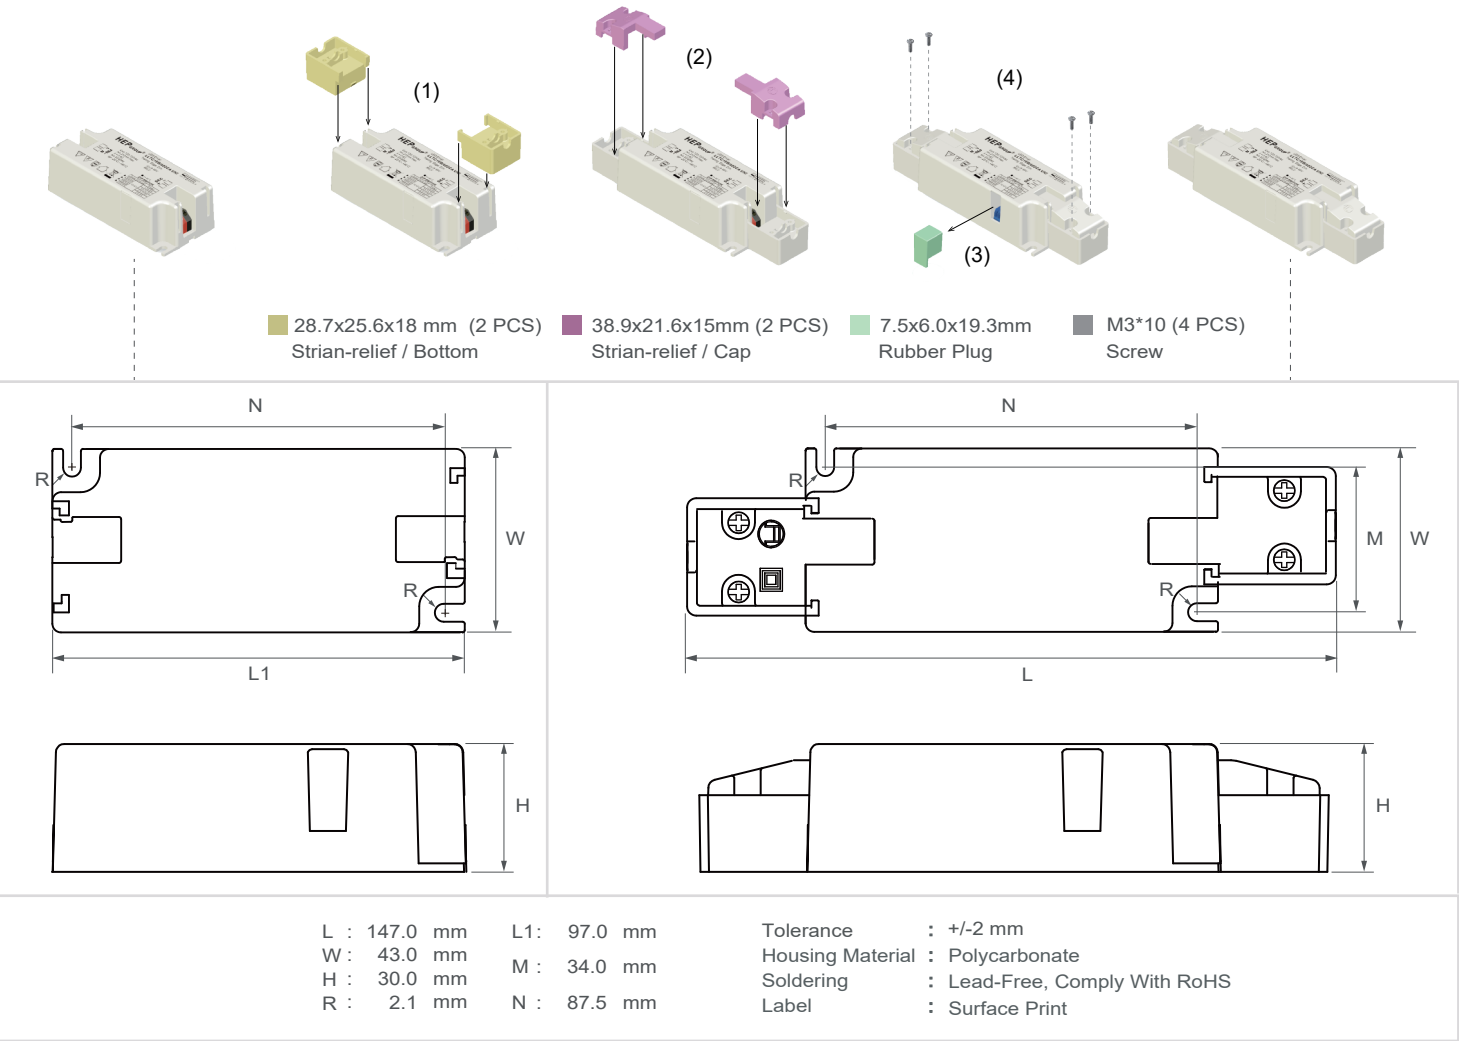

Dip Switch - One driver offers 3 choosable output current

	Current		Dip-switch setting	
			1	2
	1050mA		ON	ON
	900mA		ON	-
	800mA		-	-

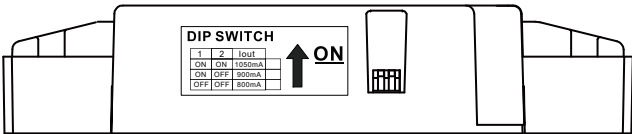

Wiring Diagram

