



Item		Value	Remark
Input	Nominal voltage	220-240V	
	Nominal frequency	50–60Hz	
	AC voltage range	198-264V	
	DC voltage range (start)	N/A	
	DC voltage range (operation)	N/A	
	Nominal current	50mA	
	Total Harmonic Distortion (THD)	< 20%	Full load @230VAC
	Power factor	0.9C	Full load @230VAC
	Displacement factor	0.9C	Full load @230VAC
	Efficiency		
	G5RT7W150/350LRP	75%(Typ.)	Full load @230VAC
	G5RT7W500/700LRP	72%(Typ.)	Full load @230VAC
	No-load power	NA	
	Stand-by power	NA	
	Protection class	NA	
Output	Inrush current	9A / 23us	
	Max.units per circuit breaker	Type B , 10A MCB	80
		Type B , 16A MCB	128
		Type C , 10A MCB	100
		Type C , 16A MCB	160
	Earth leakage current	NA	
	Nominal voltage range		
	G5RT7W150LRP	30-42Vdc	
	G5RT7W350LRP	12-22Vdc	
	G5RT7W500LRP	9-13Vdc	
	G5RT7W700LRP	6-9Vdc	
	Maximum voltage		
	G5RT7W150LRP	55V	
	G5RT7W350LRP	28V	
	G5RT7W500LRP	21V	
	G5RT7W700LRP	18V	

	Item	Value	Remark
Output	Nominal current range		
	G5RT7W150LRP	150mA	Full load @220~240VAC
	G5RT7W350LRP	350mA	Full load @220~240VAC
	G5RT7W500LRP	500mA	Full load @220~240VAC
	G5RT7W700LRP	700mA	Full load @220~240VAC
	Current accuracy		Full load @220~240VAC
	G5RT7W350/500/700LPR	± 5%	
	G5RT7W150LPR	±7%	
	Typical output LF current ripple	± 5%	Low Frequency<120Hz
	SVM	≤ 0.4	Full load @230VAC
	P _{st} LM	≤ 1	Full load @230VAC
	Nominal power range		
	G5RT7W150LRP	4.5-6.3W	
	G5RT7W350LRP	4.2-7.7W	
	G5RT7W500LRP	4.5-6.5W	
	G5RT7W700LRP	4.2-6.3W	
	Maximum power	7W	
Dimming	Dimming control	Trailing Edge	
	Dimming technique	Amplitude	
	PWM frequency	NA	
	Dimming range	10-100%	
	Lowest dimming current	2-6%	
	Galvanic isolation	NA	
Environment	Ambient temperature range t _a	-20°C - +50°C	
	Maximum case temperature t _c	80°C	
	Max. case temp. in fault condition	110°C	When operating under fault conditions, the temperature of the enclosure at any location should not exceed 110 °C
	Storage temperature range	-40°C - +85°C	
	Relative humidity	10% - 95%	
	Surge transient protection	1 kV	L/N
	Environmental rating	Indoor	
	IP rating	IP20	
	Mains switching cycles	> 100,000	
	Expected lifetime	> 50,000 h, t _c 80 °C @ t _a 50 °C > 100000 h, t _c 70 °C @ t _a 40 °C	0.2 % / 1,000 h failure rate 0.1 % / 1,000 h failure rate
Packing	Gross weight/box	4.1 kg	
	Net weight/box	3.7 kg	
	Pcs/box	60 PCS	
	Dimension/box	240(L)*190(W)*185(H)mm	
Protections			
	Short-circuit Protection	Auto recovery	
	Open-circuit Protection	Auto recovery	
	Overload Protection	Auto recovery	
Conformity & Standards			
	Safety standard:	EN 61347-1, EN 61347-2-13, EN 62493	
	Performance:	EN 62384	
	EMC standard:	EN 55015, EN 61000-3-2, EN 61000-3-3, EN 61547	





Cable information		
PRI	Connection	L N
	Color	Brown Blue
	Wire type	7022 7022
	Wire diameter	AWG20 AWG20
	Wire length	138mm 138mm
	Stripping	6mm 6mm
	tolerance	±5mm ±5mm
Sec	Connection	+ -
	Color	Red Black
	Wire type	3385 3385
	Wire diameter	AWG22 AWG22
	Wire length	138mm 138mm
	Stripping	6mm 6mm
	tolerance	±5mm ±5mm

Subject to change without notice, HEP guarantees all products perform functionally well


* If not mentioned, all the test conditions are based on full load at 230VAC input (for 220-240 VAC input).

Trailing Edge Dimmer list approved by HEP

Manufacturer	Model	Q'ty of parallelconnection
Philips	SED-200A	14
Merten/Schneider	SBD315RC	23
Etman	ETM327	23
Etman	ETM329	23
Busch	6523 UR-103	30
Busch	6523 U-102	8
Niko	310-0190X	15
JUNG	LB-Management	10
Merten	SBD200LED(MEG5134-0000)	13
AU	P3	18
CASAMBI	CBU-TED	9

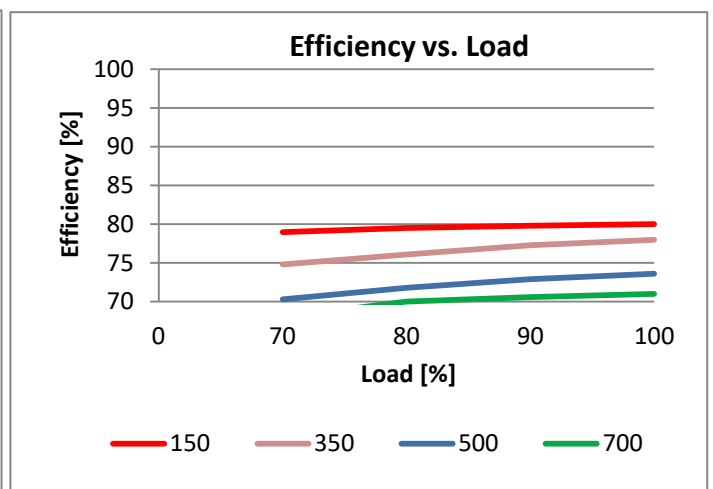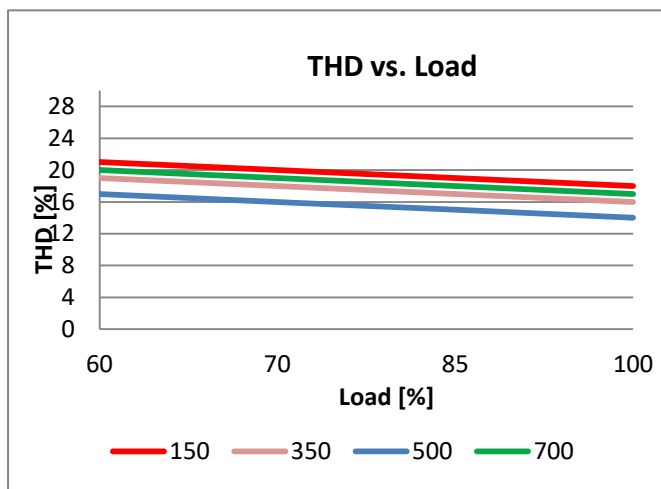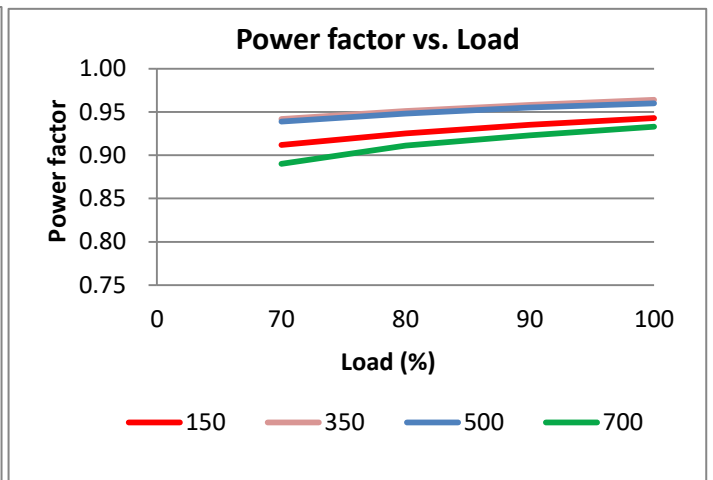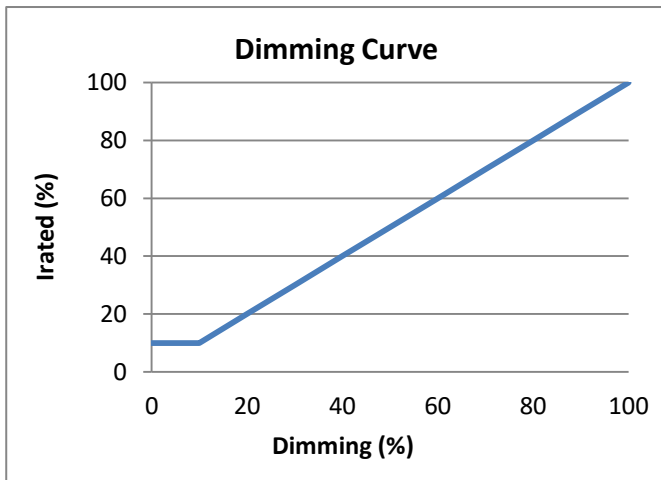


Physical
Parameter

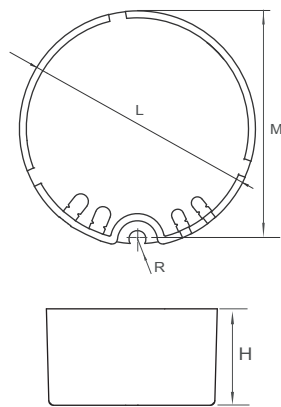

L : 44.3 mm M : 42.8 mm
H : 25 mm R : 1.6 mm
Tolerance : +/-1 mm , R : +/-0.5 mm
Housing Material : Polycarbonate / Potting
Soldering : Lead-Free, Comply With RoHS
Label : Surface Print

Wiring Diagram

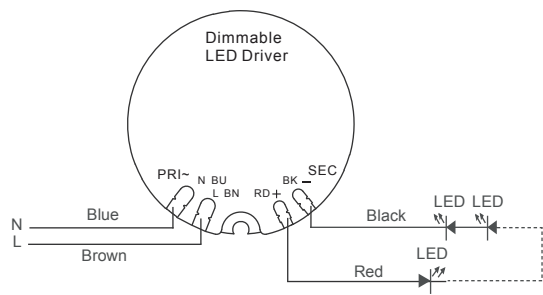

TC location (Bottom)

