

Approval Marks




	Item	Value	Remark
Input	Nominal voltage	220–240V	
	Nominal frequency	50–60Hz	
	AC voltage range	198–264V	
	DC voltage range (start)	NA	
	DC voltage range (operation)	NA	
	Nominal current	720mA	Full load @230VAC
	Total Harmonic Distortion (THD)	< 10%	Full load @230VAC
	Power factor	0.95	Full load @230VAC
	Displacement factor	0.95	Full load @230VAC
	Efficiency	91% (Typ.)	Full load @230VAC
	No-load power	NA	
	Stand-by power	< 0.5W	
	Networked standby power	NA	
	Protection class	II	Suitable for class II luminaires
	Inrush current	78A / 250us	
	Earth leakage current	NA	
Output	Nominal voltage range	24Vdc	
	Maximum voltage	25Vdc	
	Voltage accuracy	± 2.5%	Full load @230VAC
	Output LF voltage ripple	± 3%	< 120Hz
	Starting time	< 0.5 S	Full load @230VAC
	Nominal power range	5-150W	
	Nominal current range	200-6250mA	
	Maximum current	6250mA	
	Maximum power	150W	
	Dimming control	DALI/Touch Dim	
Dimming	Dimming range	1-100%	
	Lowest dimming current	NA	
	Dimming technique	PWM	
	PWM frequency	2KHz	
	Galvanic isolation	Basic insulated to PRI and double insulated to SEC	


Item	Value	Remark
Ambient temperature range t _a	-20°C - +50°C	
Maximum case temperature t _c	90°C	
Max. case temp. in fault condition	110°C	When operating under fault conditions, the temperature of the enclosure at any location should not exceed 110 °C
Storage temperature range	-40°C - +85°C	
Relative humidity	10% - 95%	
Surge transient protection	1 kV	L/N
Environmental rating	Indoor	
IP rating	IP20	
Mains switching cycles	>100,000	
Expected lifetime	> 50,000 h, t _c 90 °C @ t _a 50 °C > 100000 h, t _c 80 °C @ t _a 40 °C	0.2 % / 1,000 h failure rate 0.1 % / 1,000 h failure rate
Gross weight/box	17.8 kg	
Net weight/box	16.5 kg	
Pcs/box	30 pcs	
Dimension/box	490(L)*270(W)*225(H)mm	
Protections		
Short- & open circuit proof, Auto. Overload protection		
Conformity & Standards		
Safety standard:	EN 61347-1, EN 61347-2-13, EN 62493	
Performance:	EN 62384	
SAA standard:	AS/NZS 61347.1, AS/NZS IEC 61347.2.13	
EMC standard:	EN 55015, EN 61000-3-2, EN 61000-3-3, EN 61547	
DALI protocol standard:	EN 62386-101, EN 62386-102, EN 62386-207	
Cable information		
PRI Connection		
Cable cross-section	0.75-2.5□/AWG 18-14	
Stripping	9mm	
Sec Connection		
Cable cross-section	0.75-2.5□/AWG 18-14	
Stripping	9mm	
DALI		
Cable cross-section	0.75-2.5□/AWG 18-14	
Stripping	9mm	
Terminal information		
PRI Screwless Type		
SEC Screwless Type		
DALI Screwless Type		
Subject to change without notice, HEP guarantees all products perform functionally well		

* If not mentioned, all the test conditions are based on full load at 230VAC input (for 220-240 VAC input).


THD vs. Load

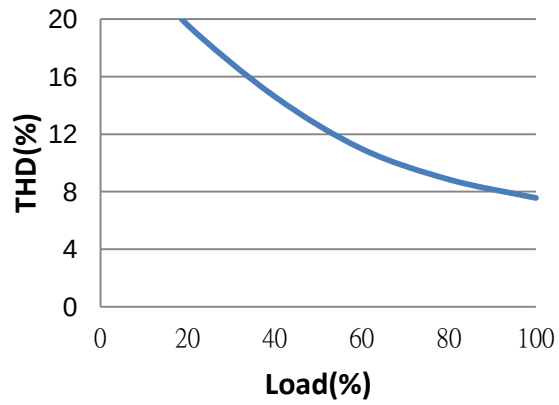


Power Factor vs. Load

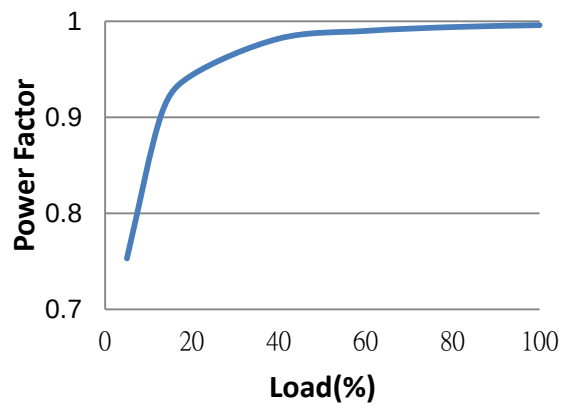

Efficiency vs. Load

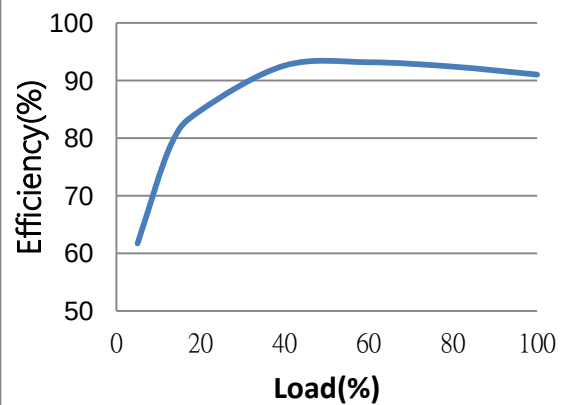

Physical Parameter

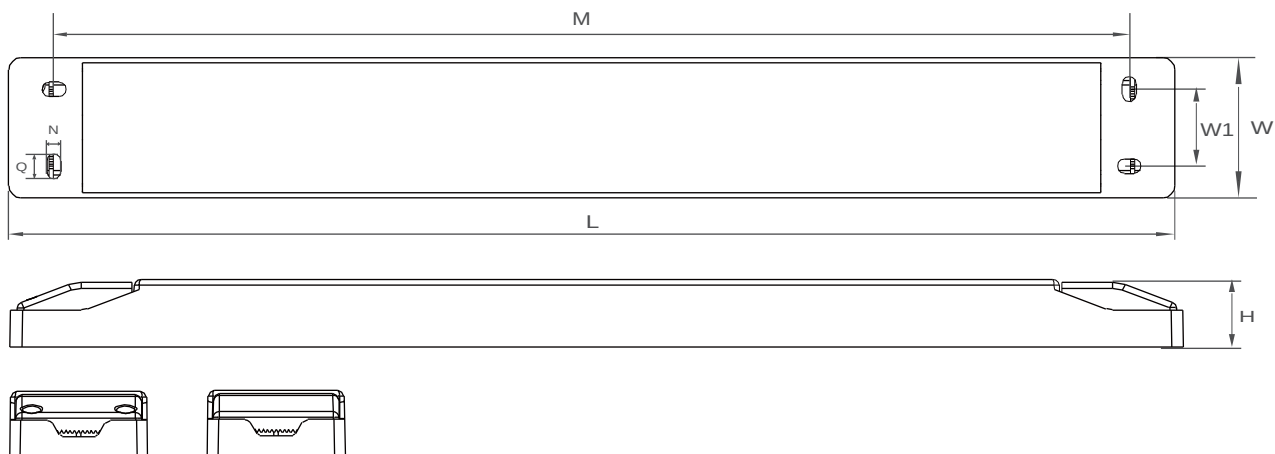

L : 425 mm M : 398 mm H : 21 mm W : 45 mm
W1: 22 mm N : 4.2 mm Q : 7.2 mm

Slot On One Side Allowing Alignment : $M \pm 3$ mm

Tolerance : ± 1 mm

Housing Material : Polycarbonate

Soldering : Lead - Free, Comply With RoHS

Label : Surface Print

Wiring Diagram

